

There's a long Naim tradition of punching above weight with the NAIT Integrated Amplifier. It began the original NAIT in 1983 and continues now with the NAIT 5i. The NAIT 5i takes all that's best about the tradition, and all that's best about its 5 Series companions.



## SIMPLE VERSATILITY



Versatility is vital for an entry level amplifier. The Nait 5i makes integration with existing

systems easy by incorporating phono socket inputs alongside the traditional DIN sockets, and offers the possibility of use with a wide range of speaker cable types. Integration with audio visual systems is handled through a programmable "unity gain" input. The 5i is intuitive in use too. A true plug and play product.


## MUSICAL PERFORMANCE

The NAIT 5i delivers fifty Watts into real loudspeaker loads, each Watt with the legendary Naim rhythmic drive and musical integrity. Entry level it may be, but the music it makes is detailed, engaging and recognisably Naim. It borrows many of the latest Naim amplifier innovations to become the finest sounding integrated ever to carry the logo.



# NAIT 5i

## INTEGRATED AMPLIFIER

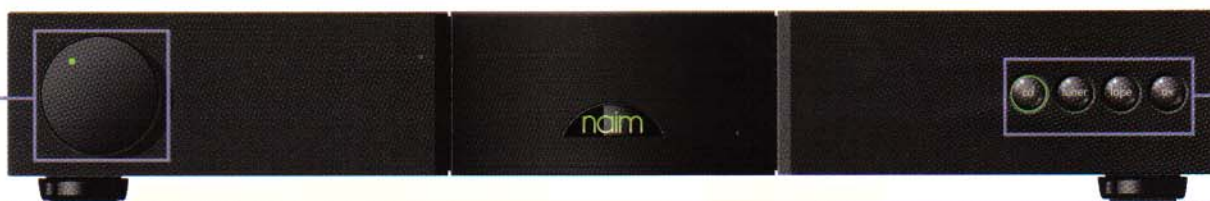

Power enough to drive almost any speaker to realistic levels.

Four line inputs, two with DIN or Phono socket options and one with an AV processor ready Unity Gain mode.



### NAIM QUALITY AND AESTHETIC

The 5i's construction and aesthetic borrow directly from the acclaimed 5 Series. It features zinc die-casting with aluminium extrusions and covers, which together result in a rigid case that offers great immunity to the effects of external vibration.

### PART OF THE FAMILY

The NAIT 5i is paired by a new Naim CD Player, the CD5i. Together they bring the possibility of Naim ownership, and the potential for intelligent upgrade all the way to systems that rank among the finest, within the range of even more music lovers.

### SPECIFICATION

Inputs: Four, 2 x DIN, 2 x Phono. Input Sensitivities: 75mV, 47k $\Omega$ . Overload Margin: 35dB (at all audio frequencies). Tape Output: 2 x Phono. Tape Output Level: 75mV, 600 $\Omega$ . Power Output: 50 Watts per channel continuous, 8 $\Omega$ , 300 VA Transient. Control: iCOM remote handset included. Case Construction: Die cast and extruded aluminium and zinc. Case Size (H x W x D): 70 x 432 x 301.

  
the Irish for naim

  
WORLD CLASS HI FI